

Method For Determining The Cetan Numbers Of Synthetic Diesel Fuel

Bazarov Bakhtiyor Imamovich¹, Odilov Odiljon Zokirjonovich², Otabayev Nodirjon Ibragimovich³, Fayziev Polat Rashidovich⁴

¹DSc, Professor Tashkent State Transport University Department "Transport power plants"

1, Temiryulchilar st., 100167, Tashkent, Uzbekistan, E-mail: baxtbb@mail.ru, ORCID ID 0000-0002-3343-3932

²PhD dotsent Department of "Land transport systems and their exploitation", Fergana Polytechnic Institute, 150107, Fergana, Uzbekistan, E-mail: Odiljonodilov5@mail.ru, ORCID ID 0000-0002-3909-8493

³PhD Department of "Land transport systems and their exploitation", Fergana Polytechnic Institute, 150107, Fergana, Uzbekistan, E-mail: otabayev1963@gmail.com, ORCID ID 0000-0003-1002-6864

⁴ORCID ID 00000 0001 8618 8910, E-mail: fayziyev1@gmail.com

Annotation: The use of synthetic motor fuels in road transport, synthesized from various sources (coal, oil shale, natural gas, biomass) is an important direction in ensuring the energy and environmental requirements for the operation of modern vehicles.

In the process of performing various search, research and other works on the production of synthetic motor fuels, it becomes necessary to determine their properties, for example, the cetane number (CN) of synthetic diesel fuel.

Experimental determination of this property of diesel fuel is costly, and in this regard, a preliminary calculation of the cetane number of synthesized diesel fuels through the cetane index is important.

This article presents the results of scientific research on the calculated determination of the cetane number of synthesized diesel fuels through the cetane index.

Key words: synthetic motor fuel, synthetic diesel fuel, cetane number, cetane index.

1. INTRODUCTION

Currently, the use of various alternative environmentally friendly energy sources, including synthetic motor fuels, is the most affordable and expedient solution to the energy and environmental problems of road transport.

In the world, technologies for the production of synthetic diesel fuel (SDF) from various raw materials (coal, oil shale, natural gas, biomass) have found the greatest distribution. At the moment, several high-performance GTL plants operate in the world industry: Mossel Bay (South Africa), Bintulu (Malaysia), Oryx (Qatar), Pearl (Qatar), Eskravos (Nigeria). A plant for the production of synthetic liquid fuels from natural gas (Gas to Liquids-GTL) is being commissioned in Uzbekistan for the production of diesel fuel, aviation kerosene, naphtha and liquefied petroleum gas.

It is known that one of the main operational properties of diesel fuel (DF), which determines the high power, economic and environmental performance of the engine, is the cetane number - the main indicator of the flammability of diesel fuel. It determines the starting of the engine, the rigidity of the working process, fuel consumption and exhaust smoke.

Usually, the determination of the cetane number (CN) of diesel fuel is carried out by an experimental method - by directly measuring the cetane number by the motor method.

However, due to the fact that this method requires significant costs, in many cases (research work, evaluation of additives to increase the cetane number), a calculation method is used to determine the cetane index (CI) of diesel fuel.

The properties of diesel fuel obtained from oil are somewhat different from the

properties of synthetic diesel fuel synthesized from other raw materials. In this regard, the calculation of CI of synthetic diesel fuel has its own characteristics.

2. PURPOSE AND PROBLEM STATEMENT

At present, synthetic diesel fuel from natural gas is produced in the world based on the Fischer-Tropsch technology. At the same time, due to the high quality requirements for diesel fuel, a wide range of research and practical work is being carried out aimed at increasing their CF and improving other operational properties of diesel fuel. In this case, there is always a need to evaluate the CC or CI of motor fuel.

It is known that the calculation of the cetane index according to existing standards applies to diesel fuel that does not contain additives and establishes a method for determining the cetane index of no more than 60 units.

Since the CN or CI of synthetic diesel fuel is more than 60 units, it is of great scientific and practical interest to calculate the CI of this motor fuel using or improving existing calculation methods.

In this regard, when using synthetic diesel fuel from natural gas, the possibility of using existing methods for calculating CI and approaches to improve them to obtain more reliable data is being studied.

In the future, by comparing the results of calculated and experimental studies, it is possible to establish the relationship between CI and CN for diesel fuels of various origins.

3. ANALYSIS OF PUBLICATIONS

Currently, modern energy and environmental problems of vehicles with an internal combustion engine are being solved using various types of environmentally friendly alternative sources, such as natural gas in compressed or liquefied form, liquefied petroleum gas, alcohols, ethers, hydrogen, biofuels, including synthetic motor fuels from various raw materials (coal, oil shale, natural gas, biomass) [1-3].

Moreover, in recent years, the technology for the production of synthetic diesel fuel from

natural gas has been dynamically developing in those countries that own sufficient natural resources, including Uzbekistan. A significant amount of work on the determination of the CN of diesel fuels has been carried out by experimental methods, where the CN is determined by comparing its combustion characteristics in a test single-cylinder engine of a classical design (standard crankcase with pump assembly, cylinder block, heat exchange cooling system, fuel system, injector assembly, electrical control system and exhaust pipe) with the characteristics of mixtures of control fuels with a known cetane number under standard operating conditions. Moreover, the numerical values of the properties of diesel fuel obtained from oil and SDF differ significantly from each other [4-8].

It is known that the cetane index is an analytical method for assessing the CN of diesel fuel and is not an alternative way to express the CN. It is an additional tool that is properly applied to limits and is used to estimate the cetane number of diesel fuel when the engine is not available for direct determination of cetane number in tests or when a sample is available that does not meet the requirements of the engine method or when a large amount of ongoing research work. If the cetane number of the fuel has been established earlier, the cetane index can be used to confirm the cetane number of other samples of this fuel, provided that the source of fuel and the method of its production remain unchanged [9-13].

Currently, several methods are used to calculate the CI of diesel fuels, for example, using an equation with four variables (density at a temperature of 15 °C and temperatures of 10%, 50% and 90% of the distillation volume), and in accordance with another method using an equation with two variables (density at a temperature of 15 °C and a temperature of 50% of the distillation volume) [14-16].

The cetane index of diesel fuel can also be approximately calculated using a formula that takes into account two parameters - the viscosity of the fuel and the density of the fuel. In addition, there is an equation for calculating the cetane index of oil fractions, which takes into account the relative specific gravity of oil fractions and

the average distillation temperature of the fuel [15–18].

4. RESEARCH METHODS

Today, diesel fuel is the most consumed motor fuel produced by global oil refineries. The volumes of production and consumption of diesel fuel are growing every year.

The cetane index of diesel fuel, along with its other main quality indicators, is regulated by certain requirements and is interconnected with many other properties.

At the same time, as was noted, most of the methods for experimentally determining the CN or CI of diesel fuels are lengthy and laborious. Considering this, when determining the CN or CI of synthetic diesel fuel, it is relevant to use and improve the known calculation methods for determining these parameters.

The use of the method for calculating the CI of diesel fuels using an equation with two variables (density at a temperature of 15 °C and a temperature of 50% of the distillation volume) is the simplest and least time-consuming, allowing one to obtain the most reliable data on the CI of synthetic diesel fuel. However, taking into account the fact that this method determines the cetane index no higher than 60 units, the nomogram for determining QI should be improved. At the same time, the data-properties of synthetic diesel fuel, entered for the calculation of CI, should be compared with similar data of diesel fuel of petroleum origin.

In the process of computational studies, distinctive values of the properties of petroleum diesel fuel will be observed (minimum values of density at 15 °C - 0.835 kg / l and temperature, fractional composition of 50% vol. - 245 °C) and other properties (Table 1).

Table 1. Comparative performance of various diesel fuels

Indicators	Unit rev.	Standarts		
		O'zDSt 1134-2018	GOST 32511-2013 (EN 590:2009)	EN 15940:2016 (GTL)
cetane number	CFR	≥50	≥51	≥70
cetane index	–	–	≥46	≥70
Carbon content	% мас.	–	86,3	85,2
Hydrogen content	% мас.	–	13,6	14,7
Net calorific value	МДж/кг	–	42,9	44,0
Density at 15°C	кг/м ³	≤840	820-845	≥765
Viscosity at 40°C	мм ² /с	3,0–6,0	2,9	2,0-4,5
Sulfur content	мг/кг	<0,01	<10	отс.
Starting temperature boiling	°C	170	170	200
End temperature boiling	°C	368	360	310
Boiling temperature 95% volume	°C	≤360	≤360	≤360
Boiling temperature 50% volume	°C	≤280	≤280	≤280
Content Polyaromatic hydrocarbons	% мас.	≤8,0	<11,0	<0,1
Content Aromatic hydrocarbons	% об.	-	≤1,0	-
Olefin content	% об.	-	≤0,1	-
Limiting Temperature	°C	≤ – 5	– 37	–27
Filterability	-	-	≤2	-
Coefficient	пс/м	≥100	≥100	≥100

Filterability Conductivity Lubricity (wear scar)	μm	460	460	460
--	----	-----	-----	-----

5. RESULTS AND DISCUSSION

5.1. The calculation of the cetane index (CI) is calculated according to the equation

$$CI = 454,74 - 1\,641,416 \rho + 774,74 - 0,554t + 97,803 (\lg t)^2, \quad (1)$$

Here : ρ - density at 15°C, g/cm³;

t - boiling point of 50% (by volume) fraction, taking into account the correction for normal barometric pressure, °C;

Lg - is the decimal logarithm.

5.2. Determination of cetane index (CI) by nomogram

The calculated value of CI according to equation (1) can be checked on the nomogram, which has been upgraded to take into account the CI of synthetic diesel fuel (Fig. 1).

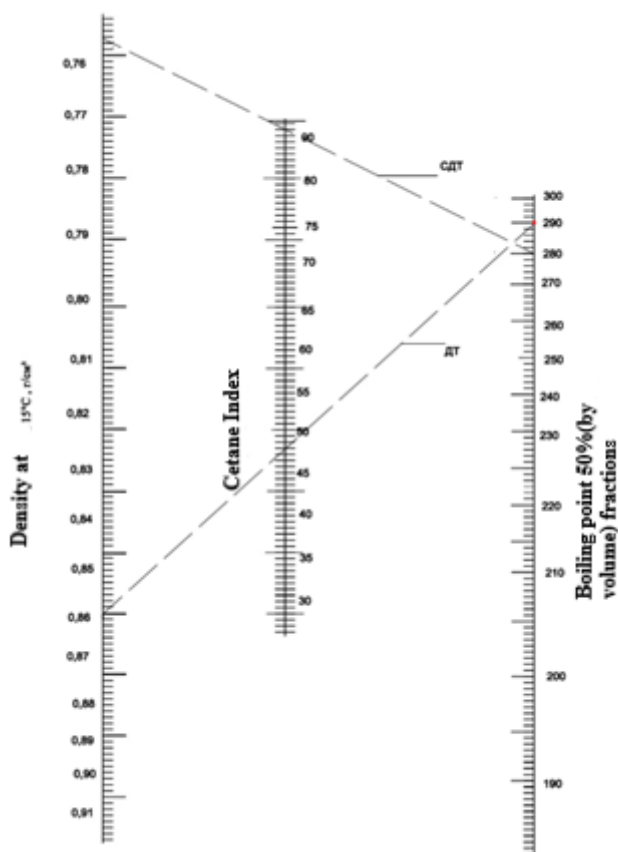


Fig.1. Upgraded nomogram for determining the cetane index of DT and SDT

5.3. Establishing the relationship between the cetane number and the index of petroleum diesel fuel and synthetic diesel from natural gas

In the course of experimental studies, SDT samples with different properties obtained

by displacement with diesel fuel with a low cetane number.

As a result of the experimental studies, the dependences between the cetane number and the index of petroleum diesel fuel and synthetic diesel fuel from natural gas were obtained (Fig.2).

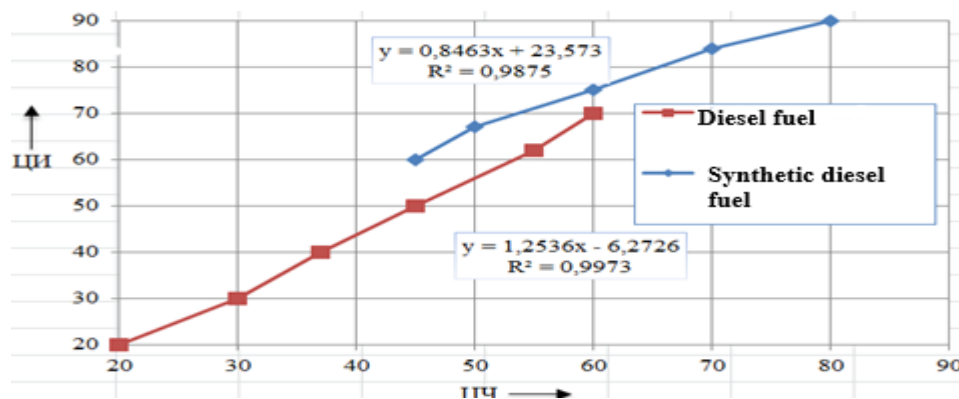


Fig.2. Relationship between cetane number and index of petroleum diesel fuel and synthetic diesel fuel from natural gas

5.4. Discussion of the results of computational and experimental studies

Computational and experimental studies to determine the flammability (cetane index) of synthetic diesel fuel have revealed the distinctive features of the relationship between the cetane number and the index of petroleum diesel fuel and synthetic diesel fuel from natural gas.

The recommended method for calculating the cetane index of synthetic diesel fuels can also be used to evaluate the flammability of diesel fuels derived from other technologies.

6. CONCLUSION

Evaluation of the flammability of synthetic diesel fuels obtained on the basis of various technologies should be carried out by calculating their cetane indices. This approach makes it possible to obtain reliable data on the flammability of the studied diesel fuels at the lowest cost.

References

1. Gureev A.A., Azeev V.S., Kamfer G.M. Diesel fuel. Properties and application.-M.: Chemistry, 1993. -336 p.
2. Technical regulation of the Customs Union TR CU 013/2011 "On requirements for motor and aviation gasoline, diesel and marine fuel, jet fuel and fuel oil
3. Gurevich I.L. Oil and gas processing technology. -M.: Chemistry, 1972. 359 p.
4. Bazarov B.I., Kalauov S.A., Vasidov A.Kh. Alternative motor fuels. Monograph. Tashkent: SHAMS ASA, 2014. 186 p. [In Russian: Bazarov B. I., Kalauov S. A., Vasidov A. X. (2014) Alternative motor fuel/ Monograph. Tashkent: SHAMS ASA]
5. Craig Brown. Gas-to-Liquid: A viable alternative to oil-derived transport fuels. Oxford Institute for Energy Studies, 2013. -34 p.
6. Analytical note: Brief review of GTL and CTL technologies. - Vladivostok: Center for Strategic Studies, 2013. -62 p.
7. Mikhailovsky A. A., Terentyeva N. A. Obtaining synthetic hydrocarbons from natural gas using GTL technology.// Bulletin of the Technological University. 2015. V.18, No. 23, - S. 31-36
8. Kozin V.G., Solodova N.L., Bashkirtseva N.Yu., Abdullin A.I. Modern technologies for the production of motor fuel components. - Kazan, 2009. - 311 p.
9. Bazarov B.I., Sidikov F.Sh., Odilov O.Z. et al. (2019) Modern trends in the use of alternative motor fuels. Journal of Advanced Research in Technical Science. 14. Vol. 2. p.186-188. [In Russian: Bazarov B. I., Sidikov F. Sh., Odilov O. Z. and al. (2019) Modern trends in the use of alternative motor fuels/ Journal of Advanced Research in Technical Science. 14. Vol. 2.]
10. Folkson R. Alternative Fuels and Advanced Vehicle. Technologies for improved Environmental Performance. London. ELSEVIER. 2014. 760 p.
11. Bazarov B.I., Otabaev N.I, Odilov O.Z., Meliev H.O., Axynov J.A. Features of Using

- Liquefied Petroleum Gas with Addition of Dimethyl Ether as Fuel of Car with Spark-Ignition Engine: International Journal of Advanced Research in Science, Engineering and Technology, Vol.7, Issue 11, November 2020, 15695-15698
12. Bazarov B.I., Akhmatjanov R.N., Fayzullayev K., Odilov O. Z., Otabayev N.I. Performance Indicators of a Passenger Car with a Spark Ignition Engine Functioning With Different Engine Fuels: Annals of R.S.C.B., Vol. 25, Issue 4, 2021, Pages. 6254 – 6262
13. Worldwide Fuel Charter. Gasoline and diesel fuel. 2019. -105 p.
14. GOST 3 2 5 1 1 -2013 (EN 590:2009) EURO DIESEL FUEL Specifications
15. O'z DSt 3134:2011 Synthetic diesel fuel component. Specifications
16. GOST 3122-67 (ST SEV 2877-81) Diesel fuels. Method for determining the cetane number
17. GOST 27768-88 (ST SEV 5871-87) Diesel fuel. Determination of cetane index by calculation method
18. ISO 4264:2018 Petroleum products. Calculating the Cetane Index of Medium Distillate Fuels Using a Four-Variable Equation [In Russian: ISO 4264 Petroleum products – Calculation of cetane index of middle-distillate fuels by the four variable equation]
19. EN 590:2009 Automotive fuels - diesel - requirements and test methods (MOD)
20. Pustovalova L.M., Nikanorova I.E. Technique of laboratory work. -M.: Phoenix, 2004. - 288 p.
21. Salomov, U. R., Moydinov, D. A., & Odilov, O. Z. (2021). The Development of a Mathematical Model to Optimize the Concentration of the Components of the Forming Adhesive Composition. *Development*, 8(9).
22. Salomov, U., Yusupov, S., Odilov, O., & Moydinov, D. (2022). Theoretical Substantiation of the Advisability of Using Adhesives When Sealing the Core of Car Radiators and Diagnosing Radiators with a Thermal Load. *International Journal of Engineering Trends and Technology*, 70(1), 81-92.
23. Zokirzhonovich, O. O. (2021). Use of Low-Carbon Technologies on Vehicle Transport. *International Journal of Innovative Analyses and Emerging Technology*, 1(5), 15-17.
24. A. G. Abdurakhmonov, O. Z. Odilov, U. U. Sotvoldiev ALTERNATIVE WAYS OF USE OF LIQUEFIED PETROLEUM GAS WITH THE ADDITIVE OF DEMETHYL ETHER AS FUEL OF A PASSENGER CAR WITH A PARK IGNITION ENGINE // Academic research in educational sciences. 2021. No. 12. URL: <https://cyberleninka.ru/article/n/alternativnyeputi-ispolzovaniya-szhizhennogo-neftyanogogaza-s-dobavkoy-demetilovogo-efira-v-kachestve-topliva-legkovogo> (date of access: 04/30/2022).
25. Ruzibaev Alisher Narkulovich, Obidov Nuriddin Gofurovich, Otaboev Nodirzhon Ibragimovich, Tozhibaev Farhad Obidzhonovich Volume hardening of teeth of excavator buckets // *Universum: technical sciences*. 2020. No. 7-1 (76). URL: <https://cyberleninka.ru/article/n/obemnoe-uprochnenie-zubiev-kovshey-ekskavatorov> (Date of access: 04/30/2022).
26. Xusanjonov, A. S., & Otaboev, N. I. (2018). Improving Of Steerability Of Automobiles With Rotation Of X-Type Of His Rear Wheels Relatively Of Front Wheels. *Scientific-technical journal*, 22(2), 131-133.
27. Axunov, J. A. (2022). ANALYSIS OF YOUNG PEDESTRIAN SPEED. *Academicia Globe: Inderscience Research*, 3(04), 193-195.
28. Akhunov, J. A. (2022). CHANGE IN THE QUANTITY OF CHILDREN'S MOVEMENT IN STREETS WHERE EDUCATIONAL INSTITUTIONS ARE LOCATED. *Academic research in educational sciences*, 3(4), 525-529.
29. Abdukhalilovich, I. I., & Abdujalilovich, J. A. (2020). Description Of Vehicle Operating Conditions And Their Impact On The Technical Condition Of Vehicles. *The American Journal of Applied sciences*, 2(10), 37-40.
30. Akhunov, J. A. (2021). IMPROVING PEDESTRIAN STRIKE RESEARCH. *Academic research in educational sciences*, 2(11), 1020-1026.
31. Oblayorovich, M. X., & Mukhamadbekovich, T. D. (2022). Analysis of the Impact of Hydraulic System Fluid Quality on the Efficient Operation of Universal-Type Tractors. *Eurasian Research Bulletin*, 6, 103-108.

32. Meliev, H. O., Ismadiyorov, A. A., Shermukhamedov, A. A., & Ergashev, N. T. (2021). NUMERICAL ANALYSIS OF THE STRESS-DEFORMATION STATE OF UNIVERSAL CHASSIS TRACTOR TRAILER BODY PLATFORM USING ALLOY AND PLAIN CARBON STEEL MATERIALS. *Academic research in educational sciences*, 2(11), 1107-1113.
33. Meliev, H. O., & Kobulov, M. (2021). ESSENCE AND SOME FEATURES OF PROCESSING PARTS BY SURFACE PLASTIC DEFORMATION. *Academic research in educational sciences*, 2(3).
34. Xujamqulov, S. U., Masodiqov, Q. X., & Abdunazarov, R. X. (2022, March). PROSPECTS FOR THE DEVELOPMENT OF THE AUTOMOTIVE INDUSTRY IN UZBEKISTAN. In E Conference Zone (pp. 98-100).
35. Khujamkulov, S., Abdubannopov, A., & Botirov, B. (2021). ANALYSIS OF THE ACCELERATION SLIP REGULATION SYSTEM USED IN MODERN CARS. *Scientific progress*, 2(1), 1467-1472.
36. Fayziyev, P. R., Ikromov, I. A., Abduraximov, A. A., & Dehqonov, Q. M. (2022). Organization of technological processes for maintenance and repair of electric vehicles. *International Journal of Advance Scientific Research*, 2(03), 37-41.
40. Fayziyev, P. R., Ikromov, I. A., Abduraximov, A. A., & Dehqonov, Q. M. (2022). Timeline: History of the Electric Car, Trends and the Future Developments. *Eurasian Research Bulletin*, 6, 89-94.
41. Sotvoldiev, U., Abdubannopov, A., & Zhalilova, G. (2021). THEORETICAL FOUNDATIONS OF THE ACCELERATION SLIDING CONTROL SYSTEM. *Scientific progress*, 2(1), 1461-1466
42. Ismadiyorov, A. A., & Sotvoldiyev, O. U. (2021). MODEL OF ASSESSMENT OF FUEL CONSUMPTION IN CAR OPERATION IN CITY CONDITIONS. *Academic research in educational sciences*, 2(11), 1013-1019.
43. Xujamqulov, S. U., Masodiqov, Q. X., & Abdunazarov, R. X. (2022, March). PROSPECTS FOR THE DEVELOPMENT OF THE AUTOMOTIVE INDUSTRY IN UZBEKISTAN. In E Conference Zone (pp. 98-100).
44. Khujamkulov, S., Abdubannopov, A., & Botirov, B. (2021). ANALYSIS OF THE ACCELERATION SLIP REGULATION SYSTEM USED IN MODERN CARS. *Scientific progress*, 2(1), 1467-1472.